



Oil Boom Specification Sheet


OCB1850

18" Oil Boom (6" Float – 12" Skirt)	
Float Fabric:	18oz or 22oz PVC Vinyl Coated Polyester Fabric
Body Fabric:	18oz or 22oz PVC Vinyl Coated Polyester Fabric
End Treatment:	24" ASTM Universal Connectors w/ toggle pin (provided)
Section Size:	50 Feet length X 12"-24" depth (custom sizes available)
Floatation:	6" Dia x 80" Expanded polystyrene (EPS) – 6 Sections per 50' section of curtain
Net Buoyancy:	10.2+ lbs per foot
Top Load Carrying Component:	Dual galvanized cable w/ coating at Top
Ballast:	5/16" Steel Chain
Connection Between Sections:	24" ASTM Universal Connectors w/ toggle pin (provided)
Optional:	BMP Supplies 5"x10' Oil Boom that connects to top cable

The information contained herein is furnished without charge or obligation and the recipient assumes all responsibility for its use. Because conditions of use and handling may vary and are beyond our control, we make no representation about, and are not responsible or liable for the accuracy and reliability of said information or the performance of any product. Any specification, property or application listed herein are provided as information only and in no way modify, amend, enlarge or create any warranty. Nothing contained herein is to be construed as permission or as a recommendation to infringe any patent.



Oil Boom Diagram:

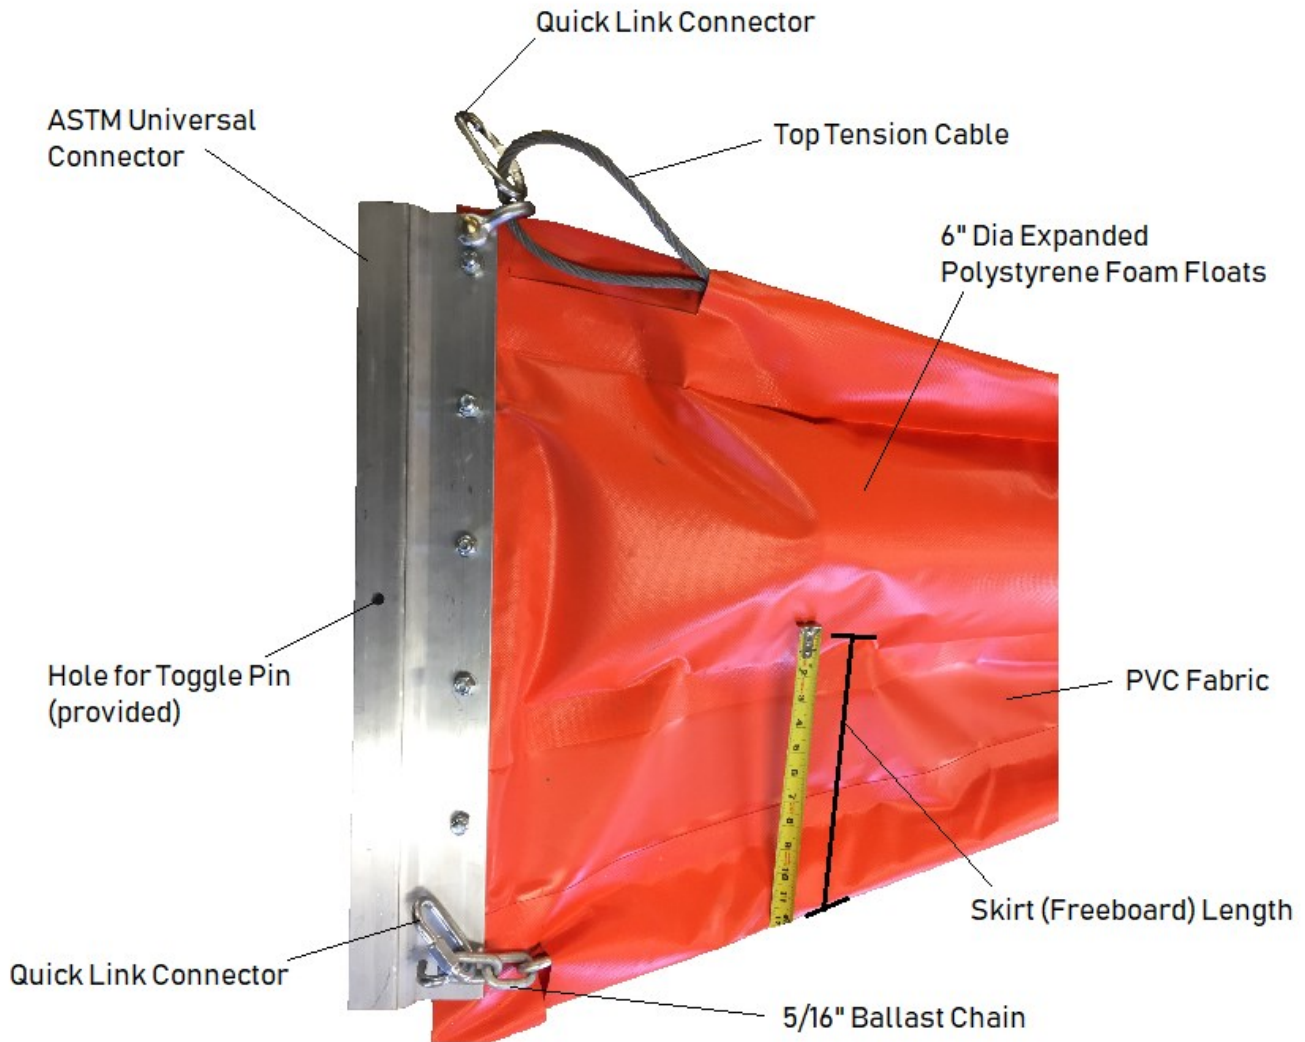

The information contained herein is furnished without charge or obligation and the recipient assumes all responsibility for its use. Because conditions of use and handling may vary and are beyond our control, we make no representation about, and are not responsible or liable for the accuracy and reliability of said information or the performance of any product. Any specification, property or application listed herein are provided as information only and in no way modify, amend, enlarge or create any warranty. Nothing contained herein is to be construed as permission or as a recommendation to infringe any patent.

